


Series 1200 Skylights

Submittal Drawing

Standard Sizes

	Model Size	Rough Opening Dimensions	Outside Curb Dimensions	Inside Skylight Frame
Square	3636	36" X 36"	39" x 39"	40.5" X 40.5"
	4848	48" X 48"	51" x 51"	52.5" X 52.5"
	6060	60" X 60"	63" x 63"	64.5" X 64.5"
Rectangle	2448	24" X 48"	27" X 51"	28.5" X 52.5"
	2496	24" X 96"	27" X 99"	28.5" X 100.5"
	24120	24" X 120"	27" X 123"	28.5" X 124.5"
	3660	36" X 60"	39" X 63"	40.5" X 64.5"
	3672	36" X 72"	39" X 75"	40.5" X 76.5"
	3696	36" X 96"	39" X 99"	40.5" X 100.5"
	36120	36" X 120"	39" X 123"	40.5" X 124.5"
	4783	47" X 83"	50" X 86"	51.5" X 87.5"
	4860	48" X 60"	51" X 63"	52.5" X 64.5"
	4872	48" X 72"	51" X 75"	52.5" X 76.5"
	4896	48" X 96"	51" X 99"	52.5" X 100.5"
	48120	48" X 120"	51" X 123"	52.5" X 124.5"
	6072	60" X 72"	63" X 75"	64.5" X 76.5"

Curb Measurements

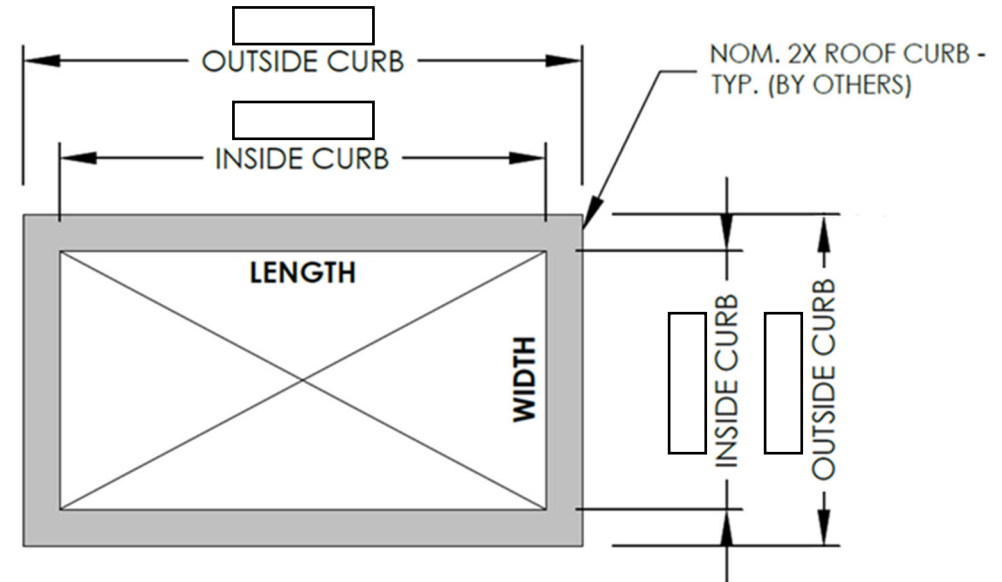

Field Measuring for Curb Mount Skylight (CM, CT)

1. Measure the outside curb dimensions and record them in the corresponding boxes above
2. Measure corner to corner to ensure the curb is square. If the curb is too far out of square, the skylight will not fit.
3. Use the Standard Sizes chart to select appropriate model.

Field Measuring for Self-Flashing Skylight (SF, SI)

1. Measure the Rough Opening dimensions and record them in the corresponding boxes above
2. Measure corner to corner to ensure the opening is square.
3. Use the Standard Size chart to select appropriate model.

GENERAL NOTES:


1. Custom size skylights are available for series 1200 skylights, contact your customer service representative for more details.
2. Warranty is standard ten (10) years from the date of purchase, exceptions do apply. See full 10-year warranty document for more details.
3. The owner must take steps to protect personnel who may be in the area of the Skylight. The owner should restrict access only to authorized personnel who have been adequately cautioned as to the location of the Skylights and informed of the warnings. Because there is a risk of fall and resulting personal injury, we recommend protective guardrails, internal safety screens or external scages around all skylights, as well use of fall restraint systems. We also recommend that skylights are inspected annually for evidence of damage, such as cracks or penetrations. Any damage should be repaired immediately, and the area beneath the skylight should be safeguarded against falling objects.



SERIES 1200 SKYLIGHTS

RESET FORM

GENERAL OVERVIEW:

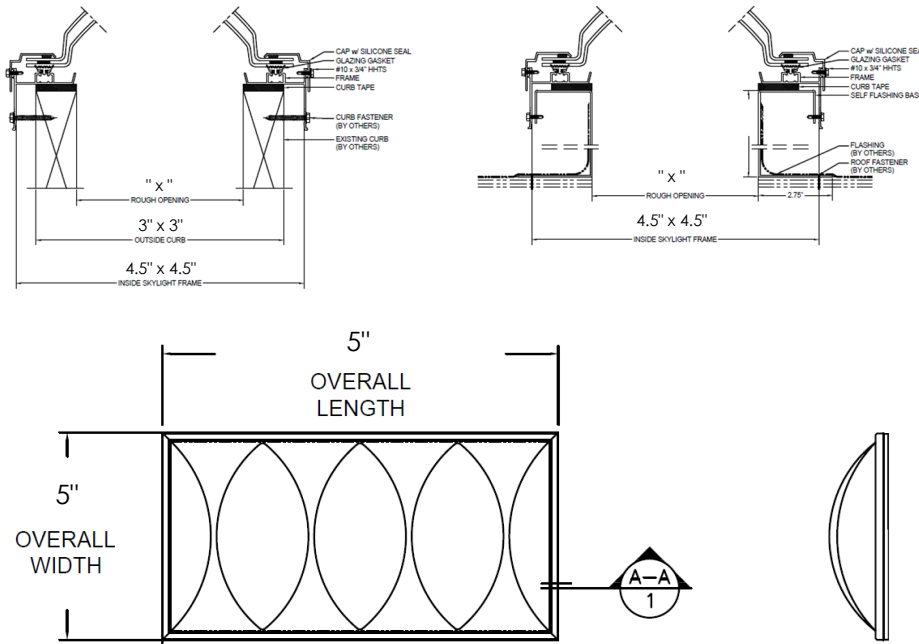

SELECTIONS:

SIZE:

INSIDE CURB WIDTH:

INSIDE CURB LENGTH:

MODEL:

- ☐ KS12: NON-THERMALLY BROKEN SKYLIGHT
☐ KT12: THERMALLY BROKEN SKYLIGHT

MOUNTING:

- ☐ CURB MOUNT (CM) ☐ CURB MOUNT W/TAPE (CT)
☐ SELF-FLASHING (SF) ☐ SELF-FLASHING W/INSULATION (Si)

GLAZING? ☐ Single ☐ Double ☐ Triple

OUTER DOME

- ☐ CPC: CLEAR POLYCARBONATE
☐ WPC: WHITE POLYCARBONATE

MIDDLE DOME

- CPP: CLEAR PRISMATIC POLYCARBONATE
WPP: WHITE PRISMATIC POLYCARBONATE

INNER DOME

- CPP: CLEAR PRISMATIC POLYCARBONATE
WPP: WHITE PRISMATIC POLYCARBONATE
C16: CLEAR 16MM MULTI-WALL POLYCARBONATE

SELF-FLASHING:

BASE HEIGHT:

- ☐ 9 ☐ 12 ☐ Other:

OPTIONS:


- ☐ None ☐ Wood Nailer (WN) ☐ Double Wall (DW)
☐ Welded Double Wall (WDW) ☐ Termination Bar (TB)

FINISH:


- ☐ BRONZE ANODIZED
☐ CLEAR ANODIZED
☐ MILL FINISH (MF)
☐ KYNAR (KY):

MODEL STRING: 00OffOffOffOffOffOffOff


MODEL VARIATIONS:



MOUNTING VARIATIONS:

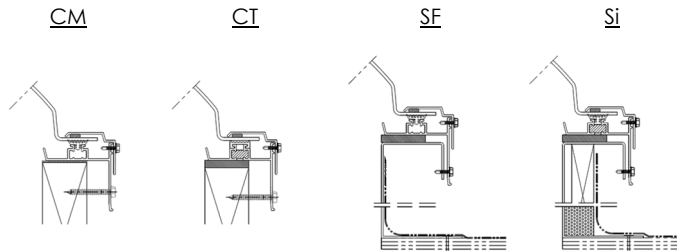

GLAZING:

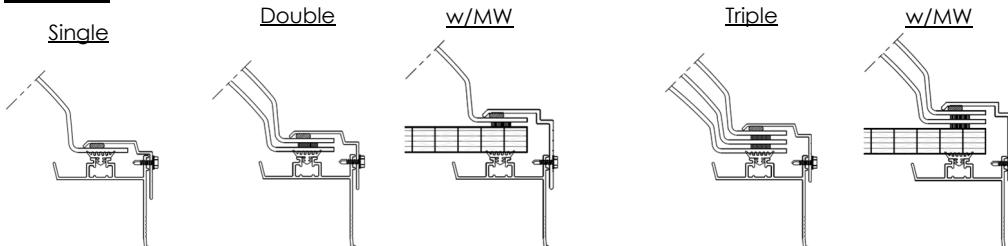

QUOTE #:

QUANTITY:

APPROVED DATE:

APPROVED BY:

CUSTOMER:

PROJECT:

