


Series 1400 Skylights

Submittal Drawing

Standard Sizes

	Model Size	Rough Opening Dimensions	Outside Curb Dimensions	Inside Skylight Frame	Dome Height
Square	1414	14.25" x 14.25"	17.25" x 17.25"	18.75" x 18.75"	5"
	1919	19" x 19"	22" x 22"	23.5" x 23.5"	5"
	2222	22.25" x 22.25"	25.25" x 25.25"	26.75" x 26.75"	5"
	3030	30.25" x 30.25"	33.25" x 33.25"	34.75" x 34.75"	6"
	3737	37" x 37"	40" x 40"	41.5" x 41.5"	6"
	4242	42" x 42"	45" x 45"	46.5" x 46.5"	7"
	4646	46.25" x 46.25"	49.25" x 49.25"	50.75" x 50.75"	10"
	4848	48" x 48"	51" x 51"	52.5" x 52.5"	11"
	5555	55" x 55"	58" x 58"	59.5" x 59.5"	12"
	7070	70.25" x 70.25"	73.25" x 73.25"	74.75" x 74.75"	17"
	7575	75" x 75"	78" x 78"	79.5" x 79.5"	19"
	8484	84" x 84"	87" x 87"	88.5" x 88.5"	21"
Rectangle#	9292	92.5" x 92.5"	95.5" x 95.5"	97" x 97"	23"
	1422	14.25" x 22.25"	17.25" x 25.25"	18.75" x 26.75"	5"
	1446	14.25" x 46.25"	17.25" x 49.25"	18.75" x 50.75"	5"
	2230	22.25" x 30.25"	25.25" x 33.25"	26.75" x 34.75"	5"
	2237	22.25" x 37"	25.25" x 40"	26.75" x 41.5"	5"
	2246	22.25" x 46.25"	25.25" x 49.25"	26.75" x 50.75"	5"
	2272	22.25" x 72"	25.25" x 75"	26.75" x 76.5"	5"
	2296	22.25" x 96"	25.25" x 99"	26.75" x 100.5"	5"
	3037	30.25" x 37"	33.25" x 40"	34.75" x 41.5"	6"
	3046	30.25" x 46.25"	33.25" x 49.25"	34.75" x 50.75"	6"
	3069	30.25" x 69.5"	33.25" x 72.5"	34.75" x 74"	7"
	3496	34" x 96"	37" x 99"	38.5" x 100.5"	8"
	3746	37" x 46.25"	40" x 49.25"	41.5" x 50.75"	9"
	3775	37" x 75"	40" x 78"	41.5" x 79.5"	9"
	3859	38" x 59"	41" x 62"	42.5" x 63.5"	9"
	4669	46.25" x 69.5"	49.25" x 72.5"	50.75" x 74"	11"
	4689	46.25" x 89.5"	49.25" x 92.5"	50.75" x 94"	11"
	4896	48" x 96"	51" x 99"	52.5" x 100.5"	12"
	5460	54" x 60"	57" x 63"	58.5" x 64.5"	13"
	6096	60" x 96"	63" x 99"	64.5" x 100.5"	15"

Curb Measurements

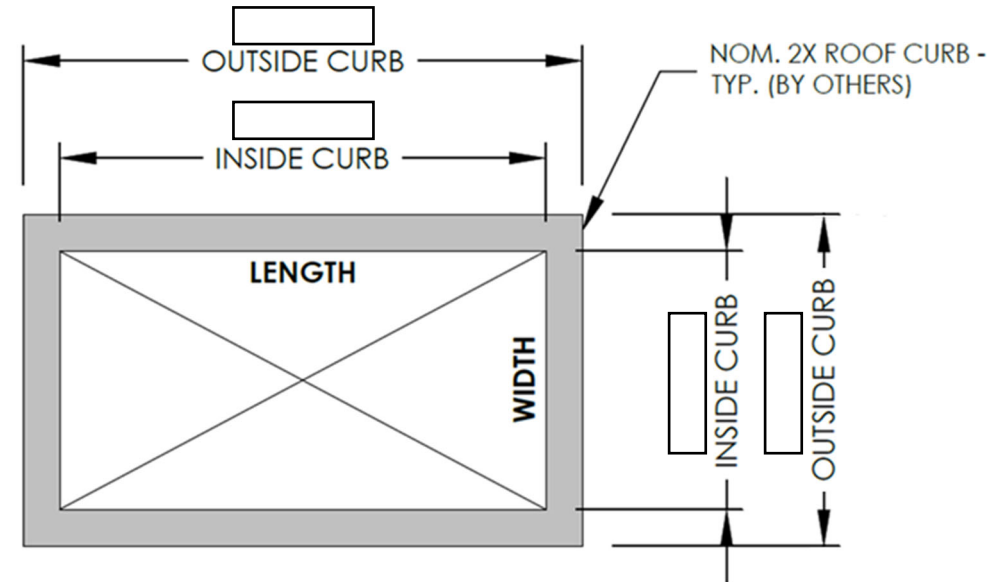

Field Measuring for Curb Mount Skylight (CM, CT)

1. Measure the outside curb dimensions and record them in the corresponding boxes above
2. Measure corner to corner to ensure the curb is square. If the curb is too far out of square, the skylight will not fit.
3. Use the Standard Sizes chart to select appropriate model.

Field Measuring for Self-Flashing Skylight (SF, SI)

1. Measure the Rough Opening dimensions and record them in the corresponding boxes above
2. Measure corner to corner to ensure the opening is square.
3. Use the Standard Size chart to select appropriate model.

GENERAL NOTES:


1. Custom size skylights are available for series 1400 skylights, contact your customer service representative for more details.
2. Warranty is standard ten (10) years from the date of purchase, exceptions do apply. See full 10-year warranty document for more details.
3. The owner must take steps to protect personnel who may be in the area of the Skylight. The owner should restrict access only to authorized personnel who have been adequately cautioned as to the location of the Skylights and informed of the warnings. Because there is a risk of fall and resulting personal injury, we recommend protective guardrails, internal safety screens or external scages around all skylights, as well use of fall restraint systems. We also recommend that skylights are inspected annually for evidence of damage, such as cracks or penetrations. Any damage should be repaired immediately, and the area beneath the skylight should be safeguarded against falling objects.




SERIES 1400 SKYLIGHTS

RESET FORM


GENERAL OVERVIEW:

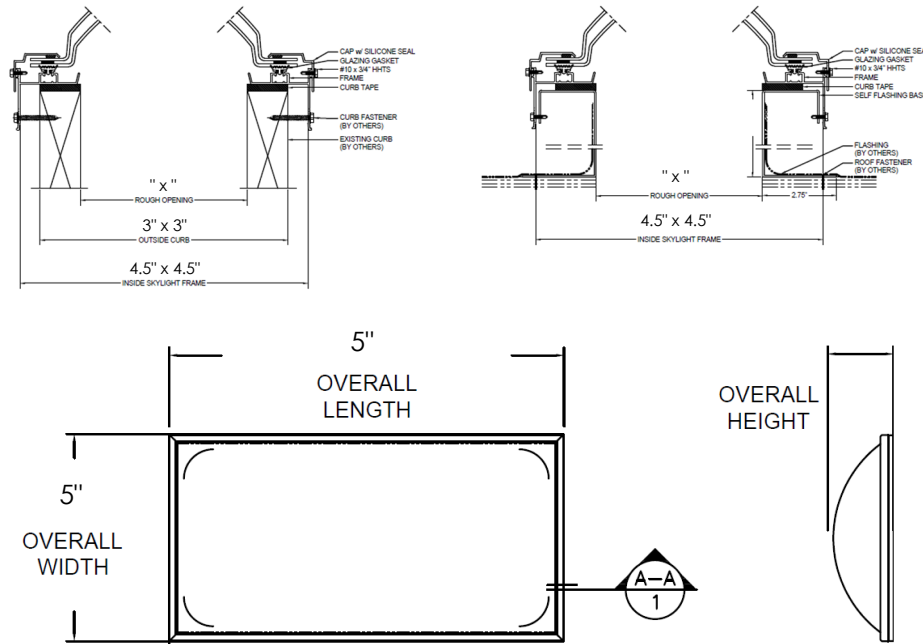


MODEL VARIATIONS:



MOUNTING VARIATIONS:

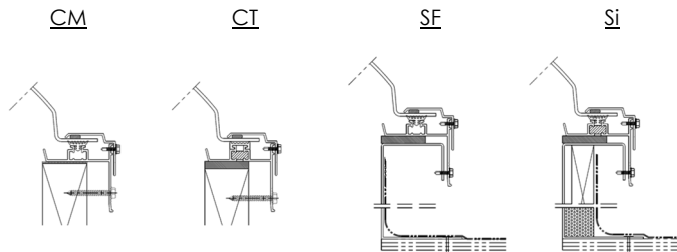

GLAZING:

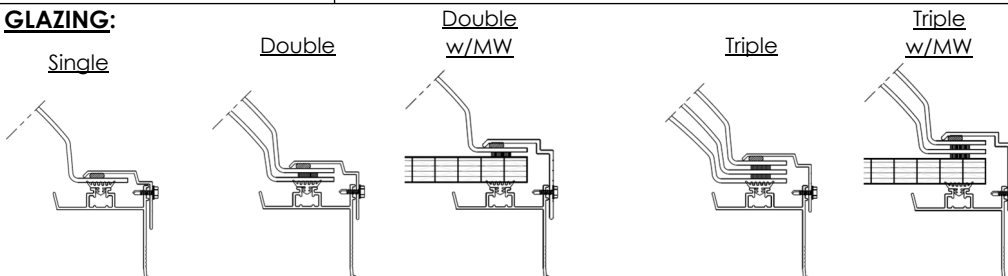

SELECTIONS:

SIZE:

INSIDE CURB WIDTH:

INSIDE CURB LENGTH:

MODEL:

- ☐ KS14: NON-THERMALLY BROKEN SKYLIGHT
☐ KT14: THERMALLY BROKEN SKYLIGHT

MOUNTING:

- ☐ CURB MOUNT (CM) ☐ CURB MOUNT W/TAPE (CT)
☐ SELF-FLASHING (SF) ☐ SELF-FLASHING W/INSULATION (Si)

GLAZING²: ☐ Single ☐ Double ☐ Triple

OUTER DOME

- ☐ BT: BRONZE TINT ACRYLIC
☐ CC: CLEAR ACRYLIC
☐ WTM: WHITE ACRYLIC

MIDDLE DOME

- ☐ BT: BRONZE TINT ACRYLIC
☐ CC: CLEAR ACRYLIC
☐ WTM: WHITE ACRYLIC

INNER DOME

- ☐ BT: BRONZE TINT ACRYLIC
☐ CC: CLEAR ACRYLIC
☐ WTM: WHITE ACRYLIC
☐ C16: CLEAR 16MM MULTI-WALL POLYCARBONATE (up to 60 width only)

SELF-FLASHING:

BASE HEIGHT:

9 12 Other:

OPTIONS: ☐ None

Wood Nailer (WN) Double Wall (DW)
 Welded Double Wall (WDW) Termination Bar (TB)

FINISH:

- ☐ BRONZE ANODIZED
☐ CLEAR ANODIZED
☐ MILL FINISH (MF)
☐ KYNAR (KY):

MODEL STRING: 00OffOffOffOffOffOff-Off

QUOTE #:

QUANTITY:

APPROVED DATE:

APPROVED BY:

CUSTOMER:

PROJECT:

