

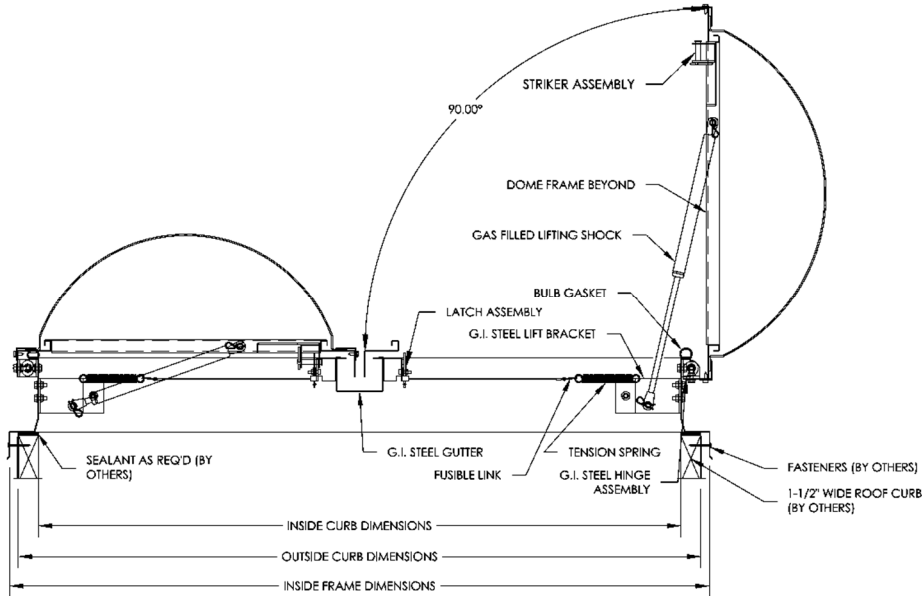


DOME SECTION:

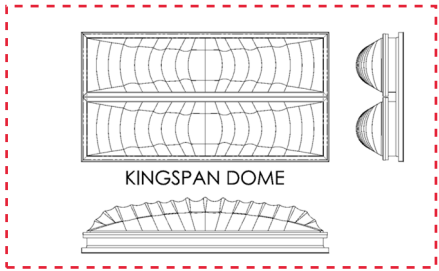

DOME SHAPE:



SIZE CHART:

| Size | Inside Curb Dims. | Outside Curb Dims. | Inside Frame Dims. |
|------|-------------------|--------------------|--------------------|
| 4848 | 48" x 48"         | 51" x 51"          | 52-1/4" x 52-1/4"  |
| 4872 | 48" x 72"         | 51" x 75"          | 52-1/4" x 76-1/4"  |
| 4896 | 48" x 96"         | 51" x 99"          | 52-1/4" x 100-1/4" |
| 6072 | 60" x 72"         | 63" x 75"          | 64-1/4" x 76-1/4"  |

GENERAL NOTES:

1. Materials shown on this drawing may not be readily available in all sizes.
2. Specification values may vary based on size and/or type of smoke vent.
3. Care should be taken when gathering site information for roof openings.
4. The owner must take steps to protect personnel who may be in the area of the smoke vents . The owner should restrict access only to authorized personnel who have been adequately cautioned as to the location of the smoke vents and informed of the warnings. Because there is a risk of fall and resulting personal injury, we recommed protective guardrails, internal safety screens around all smoke vents, as well use of fall restraint systems. We also recommend that smoke vents are inspected annually for evidence of damage, such as cracks or penetrations. Any damage should be repaired immediately, and the area beneath the smoke vent should be safeguarded against falling objects.

SELECTIONS:

PRINT

RESET FORM

SIZE:

- ☐ 4848  
☐ 4896

- ☐ 4872  
☐ 6072

FRAME MATERIAL:

- ☐ Aluminum (A-ULSV) ☐ Galvanized Steel (S-ULSV)

MOUNT:

- ☐ Curb Mount (CM) ☐ Self-Flashing Base (SF)<sup>1</sup>  
☐ Curb Mount w/Tape (CMT) ☐ Vortex Venting Base (LV)<sup>2</sup>

1. Complete page 2 of the drawing  
2. Complete page 2 of the drawing: available in 4848 & 4896 sizes only

GLAZING:

- ☐ Clear Monolithic Polycarbonate (CPC)  
☐ White Monolithic Polycarbonate (WPC)  
☐ Clear Monolithic Poly/White Prismatic Poly (CPC/WPP)<sup>3</sup>  
☐ Clear Monolithic Poly/White Prismatic Acrylic (CPC/WPM)<sup>4</sup>

3. Not available in 4896 KAT dome configuration  
4. Available only in 4896 KAT dome configuration

DOME SHAPE:

- ☐ Skywave ☐ KAT<sup>5</sup>

5. Not available in 4872 size

FUSIBLE LINK TEMPERATURE:

- ☐ 165 ☐ 212 ☐ 286  
☐ 360 ☐ 520

FINISH:

- ☐ Mill (MF)

MODEL STRING:

0OffOff-1Off-OffOff-Off



QUOTE #:

APPROVED BY:

CUSTOMER:







QUANTITY:

APPROVED DATE:

PROJECT:

BASE SECTION:

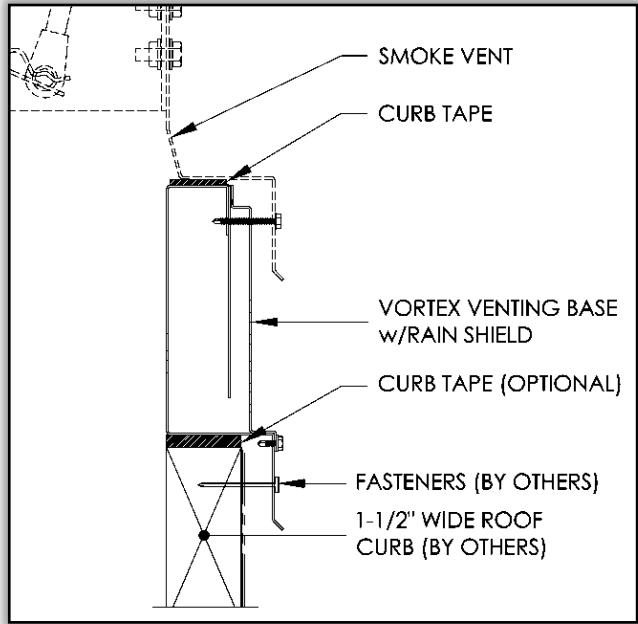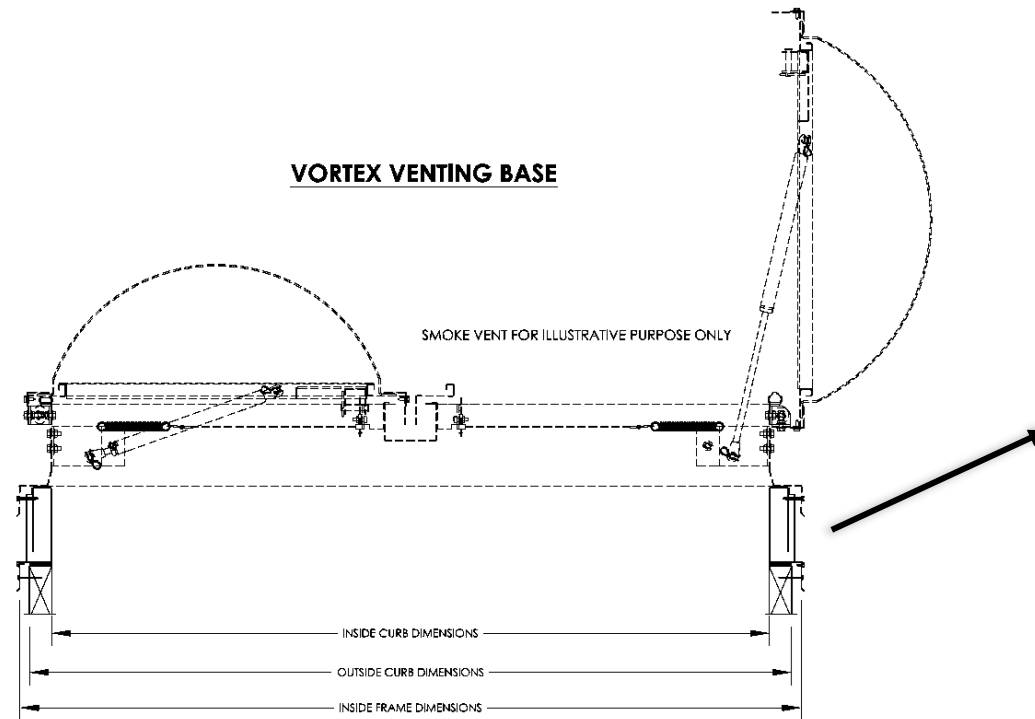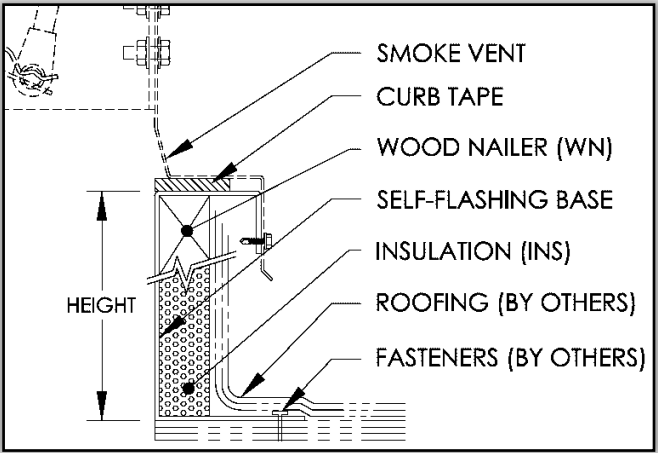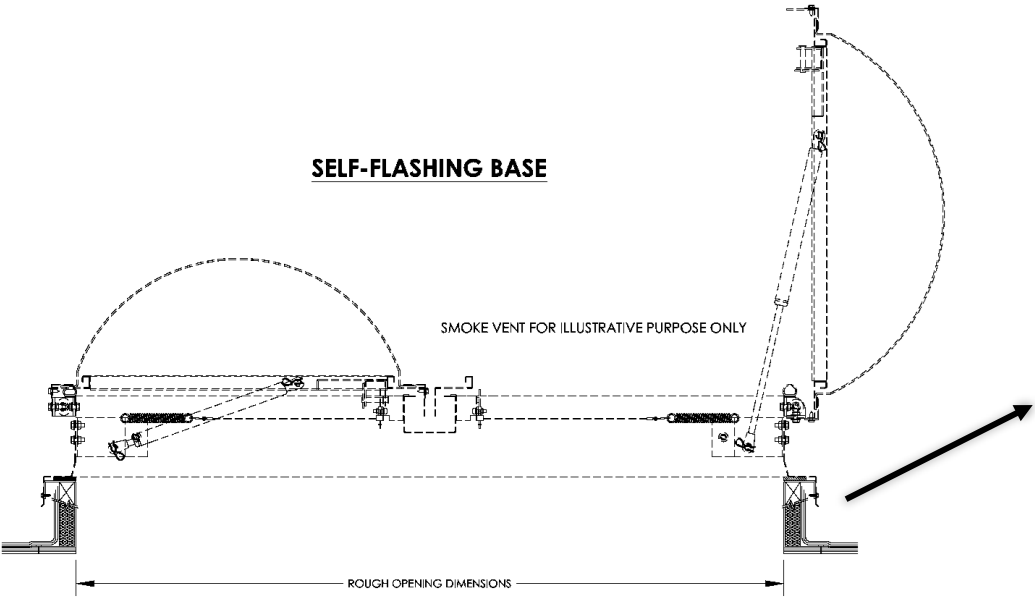

SELECTIONS:

PRINT

RESET FORM

SIZE:

- ☐ 4848  
☐ 4896

- ☐ 4872  
☐ 6072

BASE:

- ☐ Self-Flashing (SF)  
☐ Vortex Venting (LV)<sup>6</sup>

6. Available in 4848 & 4896 sizes only; Galvanized steel only

SELF-FLASHING BASE:

BASE HEIGHT:

9

12

Other:

OPTIONS: ☐ None

1" Insulated (INS)

Double Wall (DW)

Termination Bar (TB)

Wood Nailer (WN)

Welded Double Wall (WDW)

Note: If vortex venting base is selected, the self-flashing base option is not available

VORTEX VENTING BASE:

OPTIONS: ☐ None

Insect Screen (IS)

Dust Filter (DF)

FINISH:

- ☐ Mill (MF)

MODEL STRING:

0OffOff-1Off-OffOff-Off

QUOTE #:

QUANTITY:

APPROVED BY:

APPROVED DATE:

CUSTOMER:

PROJECT:

