

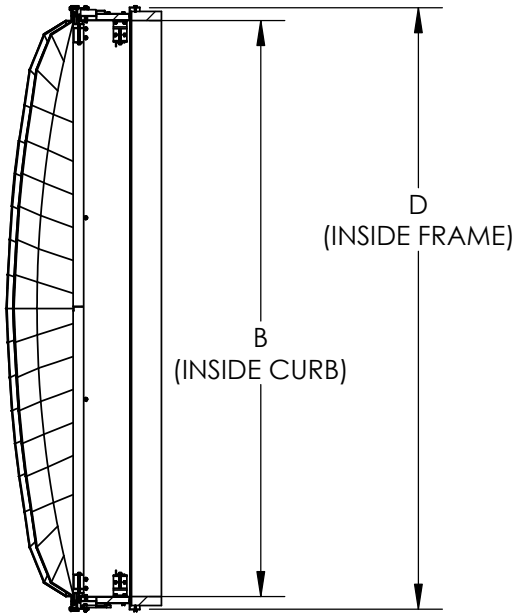


SIGNATURE:




DATE:

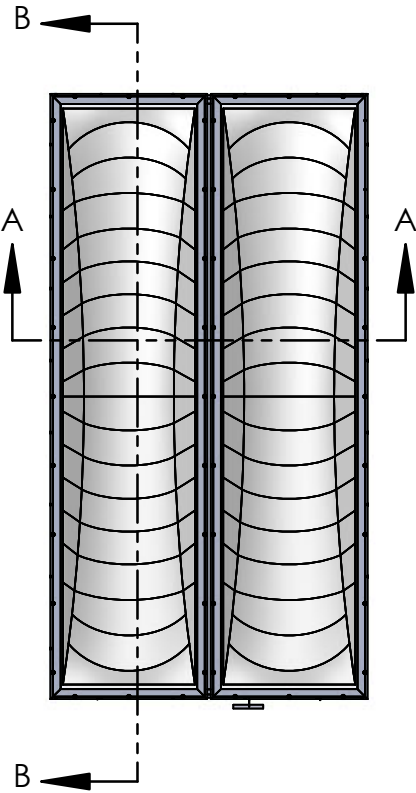


SECTION B-B

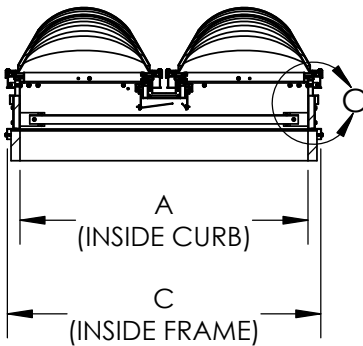

SECTION A-A

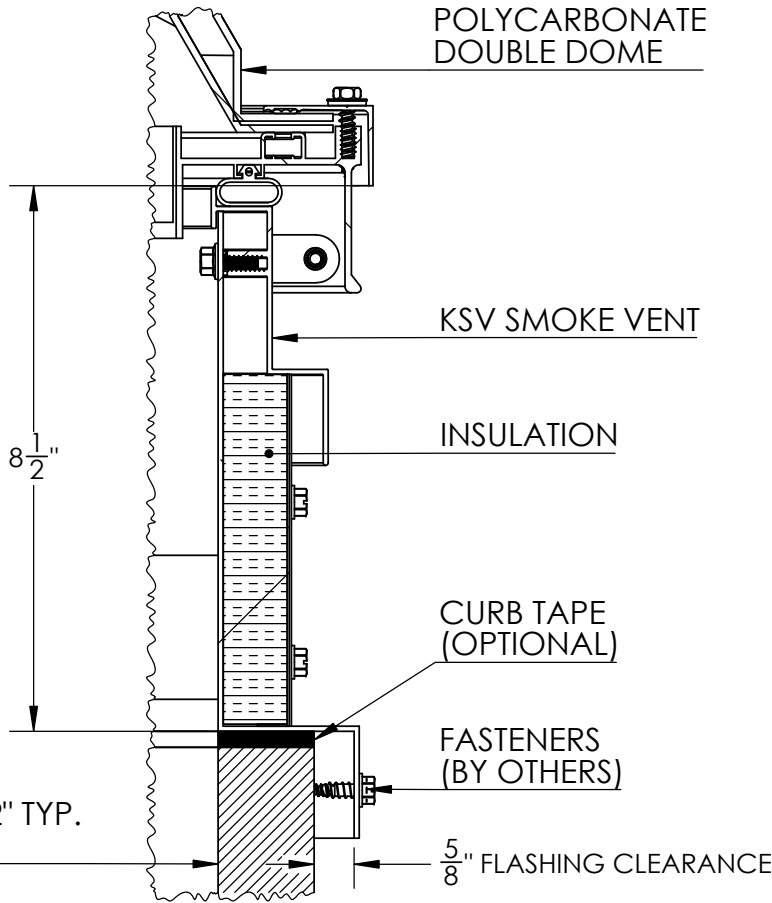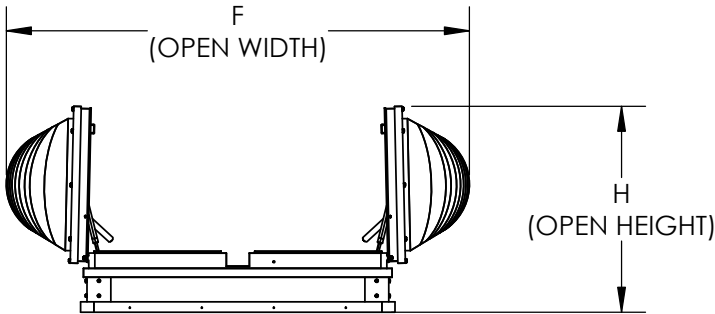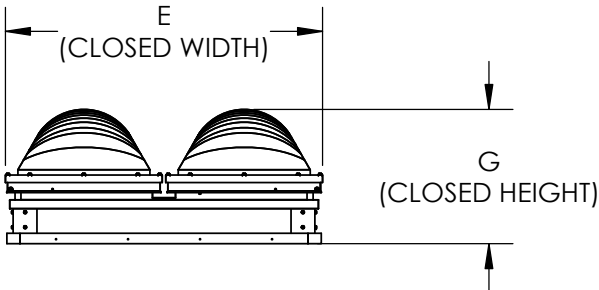

DETAIL C
SCALE 1 : 3

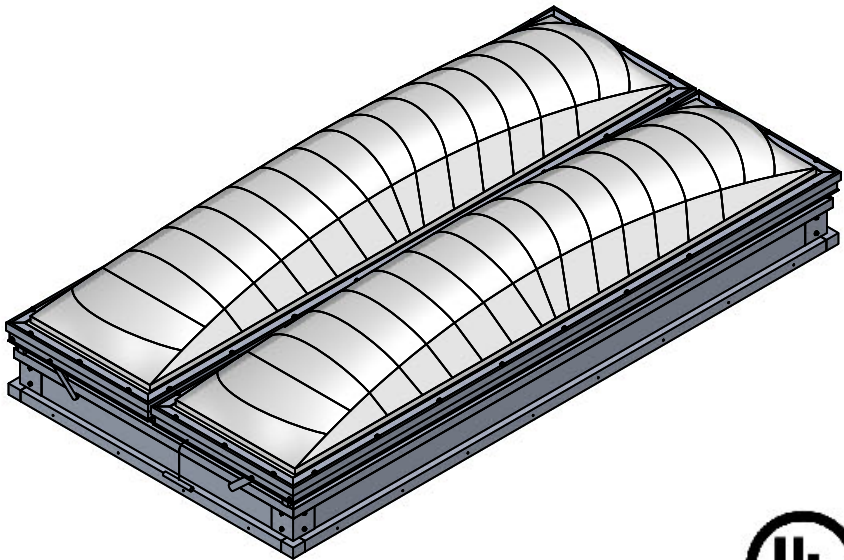

www.KingspanLightandAir.us
28662 N. Ballard Dr., Lake Forest, IL 60045
(800) 759-6985
info@kingspanlightandair.us

MODEL DESCRIPTION:

4896 - KSVi30 - CMT - 2 - CPC/WPP - K - 520 - MF

NOMENCLATURE:

4896	MODEL SIZE	520	FUSIBLE LINK TEMP.
KSVi30	KSV 30PSF (INSULATED)	MF	MILL FINISH
CMT	CURB MOUNT W/TAPE		
2	DOUBLE GLAZED		
CPC	CLEAR POLYCARBONATE		
WPP	WHITE PRISM. POLY.		
K	KAT DOME SHAPE		

NOTES:

1. ALUMINUM AND POLYCARBONATE CONSTRUCTION.
2. OUTSIDE MANUAL RELEASE ONLY.
3. MANUFACTURED & TESTED TO UL 793. CLASS 30, AND 30PSF LIVE LOAD.
4. WARRANTY IS STANDARD TEN (10) YEARS FROM THE DATE OF PURCHASE. SEE FULL 10-YEAR WARRANTY DOCUMENT FOR MORE DETAILS.
5. THE OWNER MUST TAKE STEPS TO PROTECT PERSONNEL WHO MAY BE IN THE AREA OF THE SMOKE VENTS. BECAUSE THERE IS A RISK OF FALL AND RESULTING PERSONAL INJURY, WE RECOMMEND PROTECTIVE GUARDRAILS, INTERNAL SAFETY SCREENS AROUND ALL SMOKE VENTS, AS WELL USE OF FALL RESTRAINT SYSTEMS.

VARIABLE	DIMENSION (in.)
	4896
A	48
B	96
C	52 1/4
D	100 1/4
E	52 3/4
F	77 1/4
G	22 1/2
H	34 1/4

CUSTOMER:

QUOTE NUMBER:

SUBMITTAL DATE:

PROJECT NAME:

QUANTITY:

AUTHOR:

MM

REVISION:

00

SHEET SCALE

1:32

SHEET

1

OF

1