

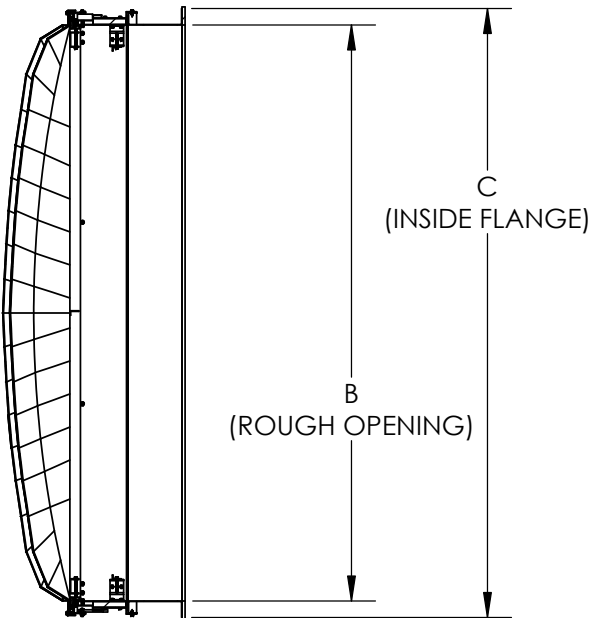


SIGNATURE:



DATE:

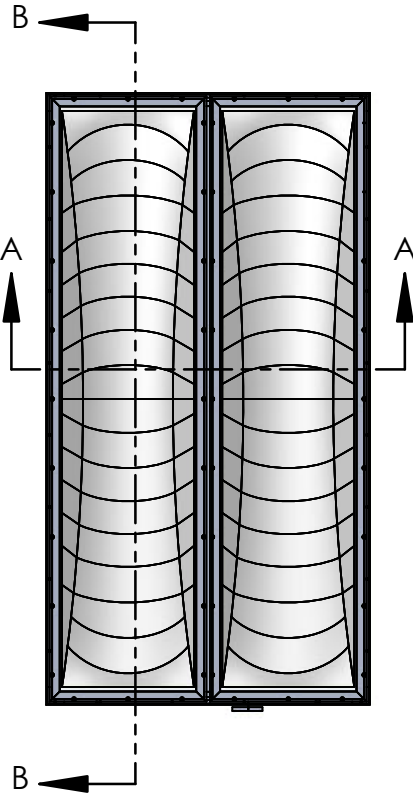



SECTION B-B

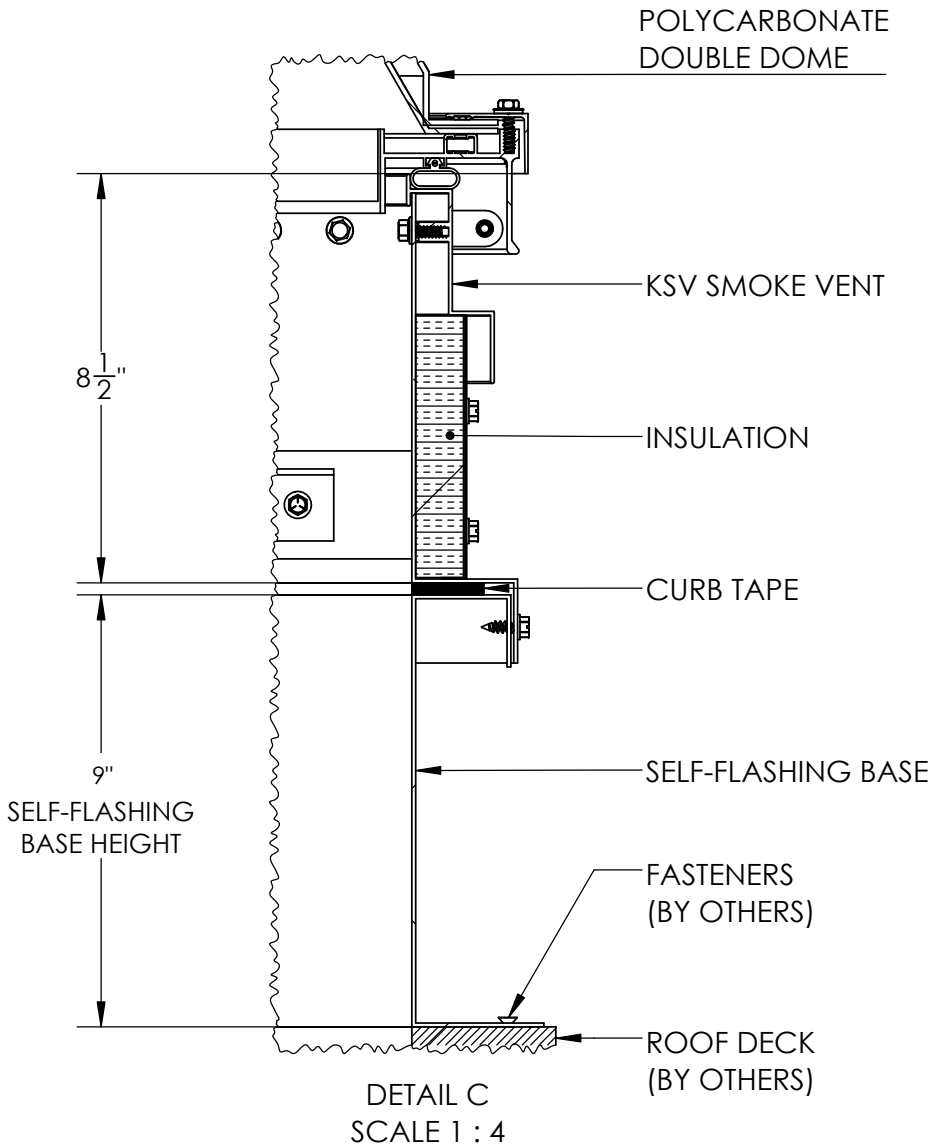

DETAIL C
SCALE 1 : 4

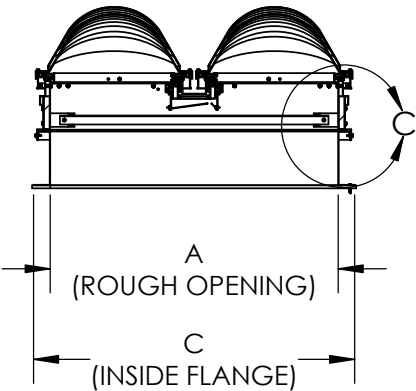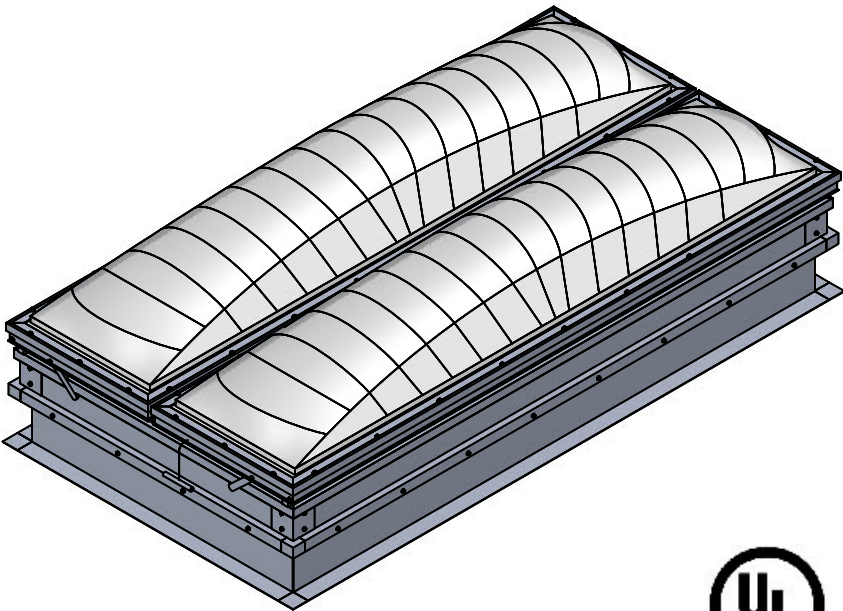

SECTION A-A

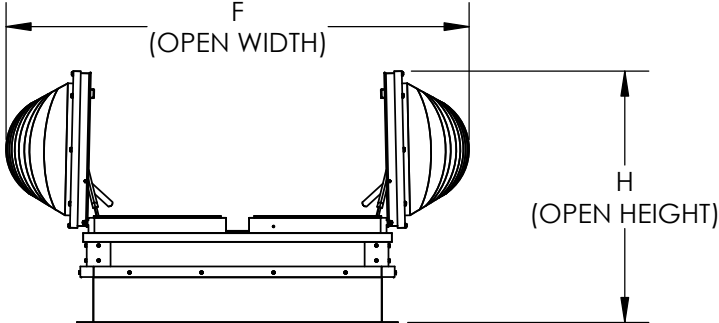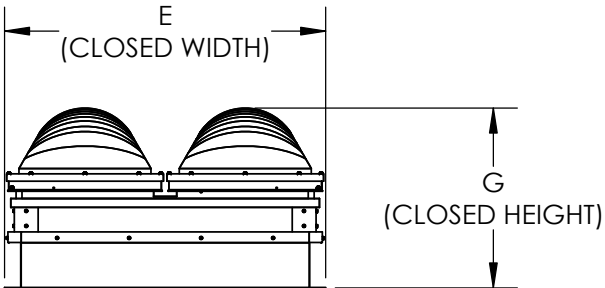

VARIABLE	DIMENSION (in.)
	4896
A	48
B	96
C	53 1/2
D	101 1/2
E	53 1/2
F	77 1/4
G	29 3/4
H	42



www.KingspanLightandAir.us
28662 N. Ballard Dr., Lake Forest, IL 60045
(800) 759-6985
info@kingspanlightandair.us

MODEL DESCRIPTION:

4896 - KSVi30 - SF - 2 - CPC/WPP - K - 360 - MF - 9

NOMENCLATURE:

4896	MODEL SIZE	360	FUSIBLE LINK TEMP.
KSVi30	KSV 30PSF (INSULATED)	MF	MILL FINISH
SF	SELF-FLASHING	9	SF BASE HEIGHT
2	DOUBLE GLAZED		
CPC	CLEAR POLYCARBONATE		
WPP	WHITE PRISM. POLY.		
K	KAT DOME SHAPE		

NOTES:

1. ALUMINUM AND POLYCARBONATE CONSTRUCTION.
2. OUTSIDE MANUAL RELEASE ONLY.
3. MANUFACTURED & TESTED TO UL 793, CLASS 30, AND 30PSF LIVE LOAD.
4. WARRANTY IS STANDARD TEN (10) YEARS FROM THE DATE OF PURCHASE. SEE FULL 10-YEAR WARRANTY DOCUMENT FOR MORE DETAILS.
5. THE OWNER MUST TAKE STEPS TO PROTECT PERSONNEL WHO MAY BE IN THE AREA OF THE SMOKE VENTS. BECAUSE THERE IS A RISK OF FALL AND RESULTING PERSONAL INJURY, WE RECOMMEND PROTECTIVE GUARDRAILS, INTERNAL SAFETY SCREENS AROUND ALL SMOKE VENTS, AS WELL USE OF FALL RESTRAINT SYSTEMS.

CUSTOMER:

QUOTE NUMBER:

SUBMITTAL DATE:

PROJECT NAME:

QUANTITY:

AUTHOR: MM

REVISION: 00

SHEET SCALE 1:32

SHEET 1 OF 1